




New C (NC) Series

Redesigned keeping compatibility

Valco Melton's NC is specially designed to meet the industry standard requirements. Achieve the best performance with this easy-to-use, compatible system. The NC Series hot melt adhesive unit offers the best reliability and total control of the unit operation. Reduce set up and increase efficiency with this system.


- Industry standard compatibility
- PID control system for accurate and controlled temperatures
- Common footprint allows for universal installation



The lid includes a reservoir seal that reduces contamination and insulates molten adhesive.




The new user-friendly panel offers easy and intuitive programming. The unit can be configured to cover each user's specific needs.



Noise-free all-pneumatic piston pump anti-pressure d system.




Easy access for maintenance operation

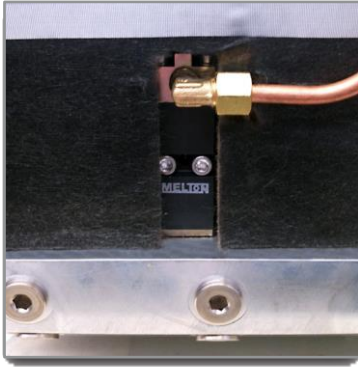

Pressure discharger module



Up to 6 compatible channels for house-gun connection

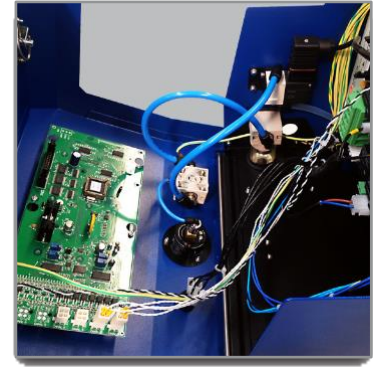


ELECTRONIC COMPONENTS easy access

Technical Specifications

Characteristics:	NC Series Units		
	NC 4	NC 8	NC 16
Unit	NC 4	NC 8	NC 16
Tank Capacity (lt)	4 lt	8 lt	14 lt
Melt Rate (Kg/h)	4, 2	7, 9	13, 5
Pump Compression Rate (Kg/h)	1:14	1:14 1:13	1:13
Max. Pump Capacity (Kg/h)	35	35 100	100
Working Temperature Range	30 - 240 °C		
Electrical Connections	220 I + T, 220III + T, 380III +N+T		
Working Viscosity (cps)	50000 cps		
Pneumatic Pressure (bar)	0.5 - 6 bar		
Electrical Consumption (W)	1800 w	2800 w	4000 w
Max. channel power (W):	1 - 2 exits	3, 4, 5, 6 exits	
Total hose + gun	1800 w	1400 w	
Per exit (hose & gun)	1800 w	1400 w	
Per channel (hose & gun)	1800 w	1400 w	

Dimension (mm)	NC 4	NC 8	NC 16
A	540	540	600
B	297	297	357
C	345	345	345
D	632	707	707

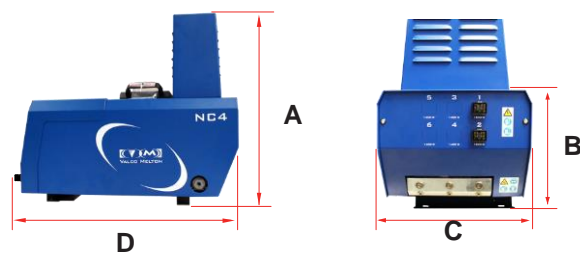

For more information, visit valcomelton.com or contact your local Valco Melton representative.

World Headquarters: USA, Cincinnati, Ohio (Corporate Offices) • Tel:+1.513.874.6550 • Fax: +1.513.874.3612

Europe Headquarters: Spain, Navarra • Tel:+34.948.321.580 • Fax:+34.948.326.584

Asia Headquarters: China, Xiamen, Fujian • Tel:+86.592.591.7854 • Fax:+86.592.591.7834

info@valcomelton.com • Serving over 76 Countries Worldwide • valcomelton.com