

## HOT MELT HOSES

### Ample Diameter & Length Ranges

Because of new and advanced designs, Valco Melton is able to offer a larger range of hot melt hoses with improved market standard adaptability. Melton® hoses are the ideal solution for quality hot melt transport and optimal benefits.

- Industry standard compatible
- Flexibility
- Interchangeability
- Versatility & dependability for all applications
- Proven design & quality guaranteed
- Long lasting design to remain "char" free
- "Nomex" insulation for the best insulation and temperature stability in the industry



An ample range of diameters and lengths:

- Ø8mm, Ø13mm, Ø16mm, Ø20mm
- Up to 26m length



Spring accessory and corrugated covers improve hose protection



Waterproof option available with specialty fittings and rubber covers for humid environments




Electrical connections are compatible with market standards



New Dual RTD Hot Melt Hoses



HP hoses support high power values and improve mechanical resistance

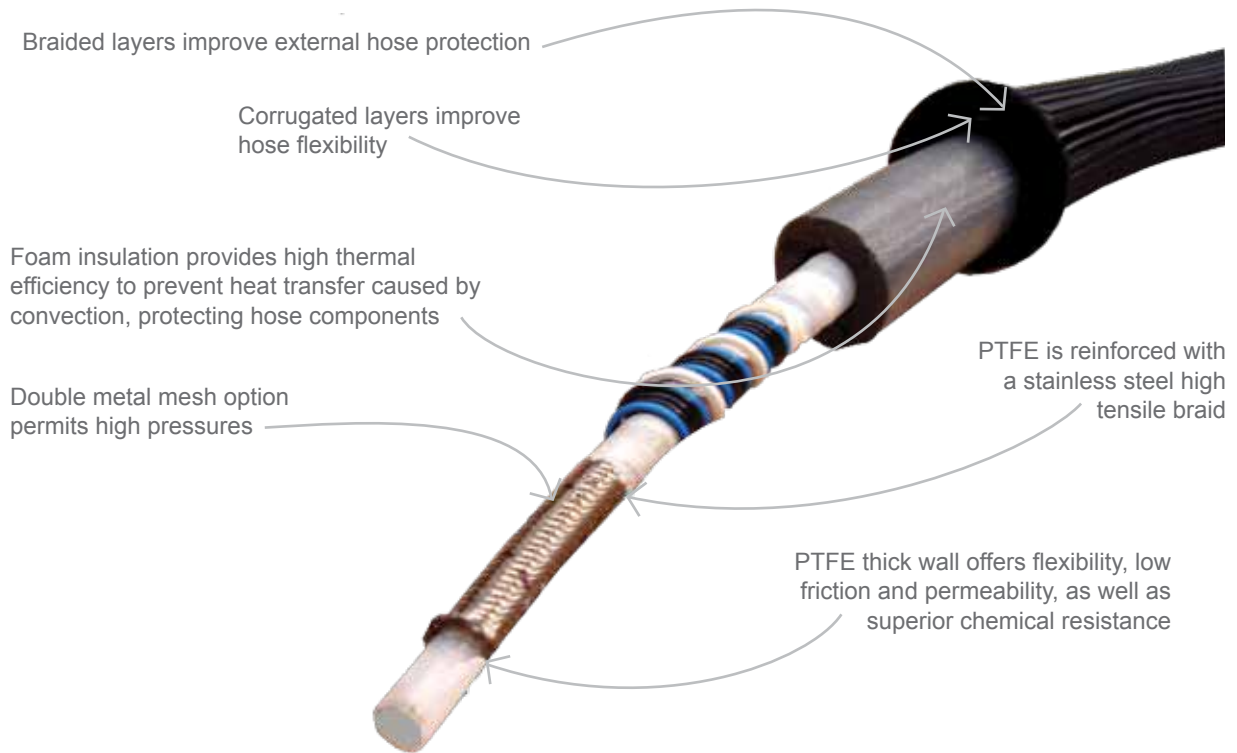

- Valco Melton manufactures hot melt hoses using top of the line market components that are 100% mechanically and electronically interchangeable
- Hot Melt Hoses are temperature sensed by Ni-120 or PT-100 RTD
- Accessories include brackets, fittings, hose protectors, corrugated and braided covers
- Valco Melton produces are CE certified

## Technical Specifications

Characteristics	Hot Melt Hoses			
Maximum Working Temperature	220°C			
Internal Diameter (mm)	Ø8	Ø13	Ø16	Ø20
Maximum Working Pressure (bar)	100	100	100	80
Power Consumption (W/m)	150	175	195	200
RTD	PT-100/ NI-120/ NTC 1000/ FEKO			
Minimum Curvature Radius (180°)	160 mm			
Voltage	200-240 VAC			



For more information, visit [valcomelton.com](http://valcomelton.com) or contact your local Valco Melton representative.

World Headquarters: USA, Cincinnati, Ohio (Corporate Offices) • Tel:+1.513.874.6550 • Fax: +1.513.874.6550

Europe Headquarters: Spain, Navarra • Tel:+34.948.321.580 • Fax:+34.948.326.584

Asia Headquarters: China, Xiamen, Fujian • Tel:+86.592.591.7834 • Fax:+86.592.591.7834

info@valcomelton.com • Serving over 76 Countries Worldwide • valcomelton.com